

Spacers 35000

Safety sensors and corresponding magnets should not be fastened directly to ferrous material. We recommend using our spacers.

Product characteristics

- Enables direct mounting of safety sensors and actuators onto ferrous materials

Technical drawing

IMAGE 1/8

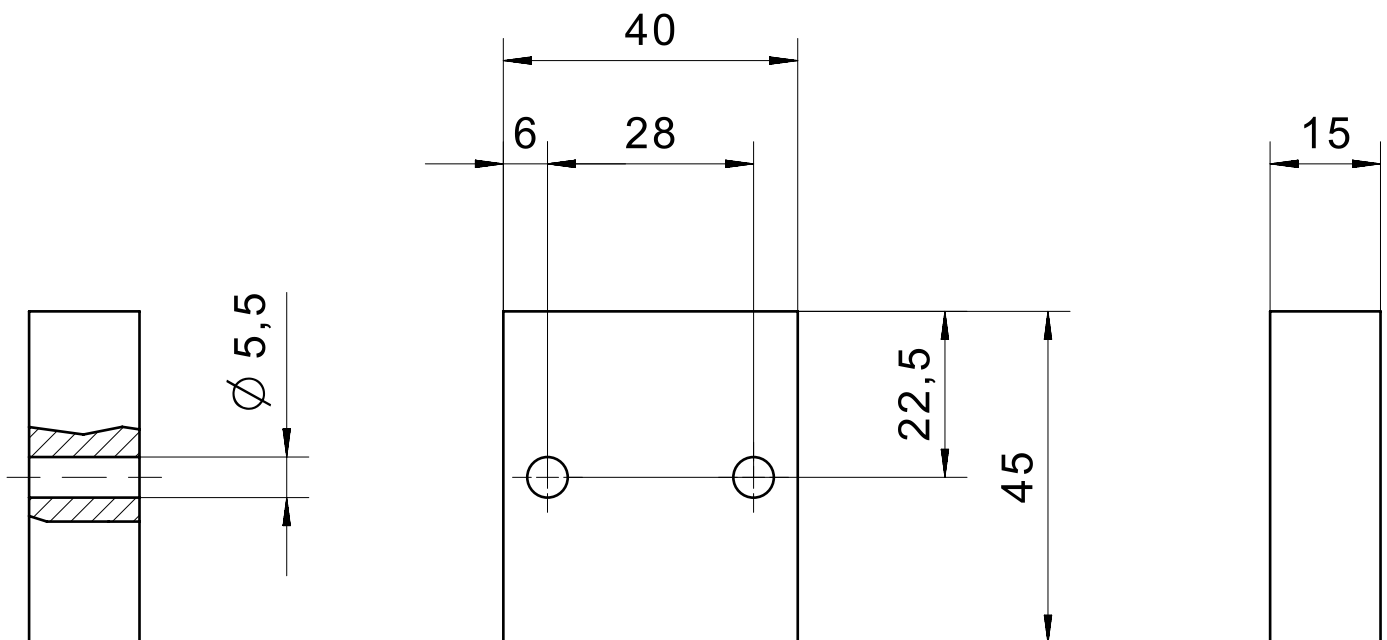


IMAGE 2/8

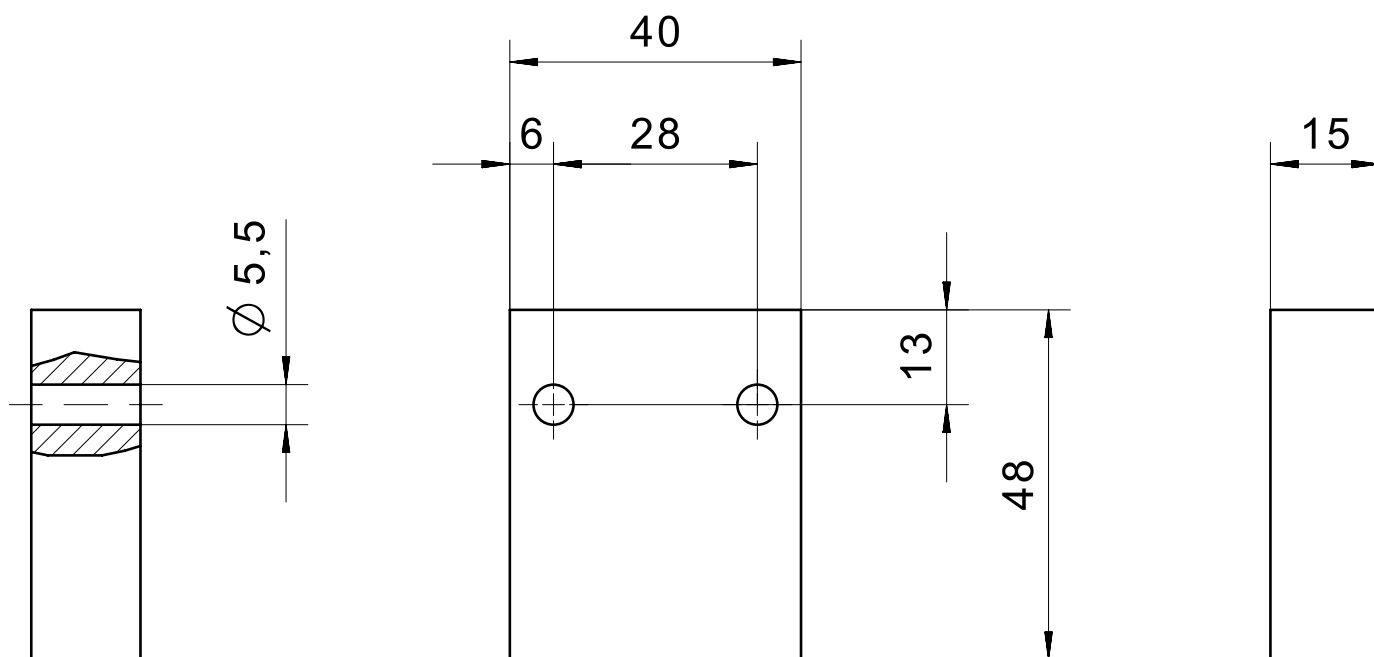


IMAGE 3/8

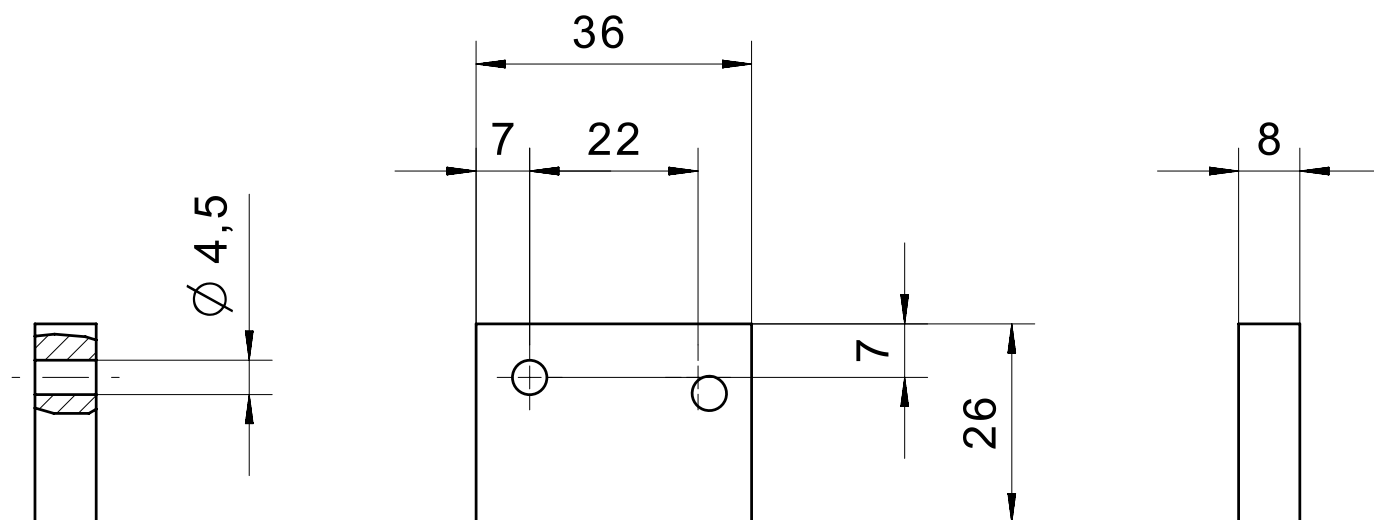


IMAGE 5/8

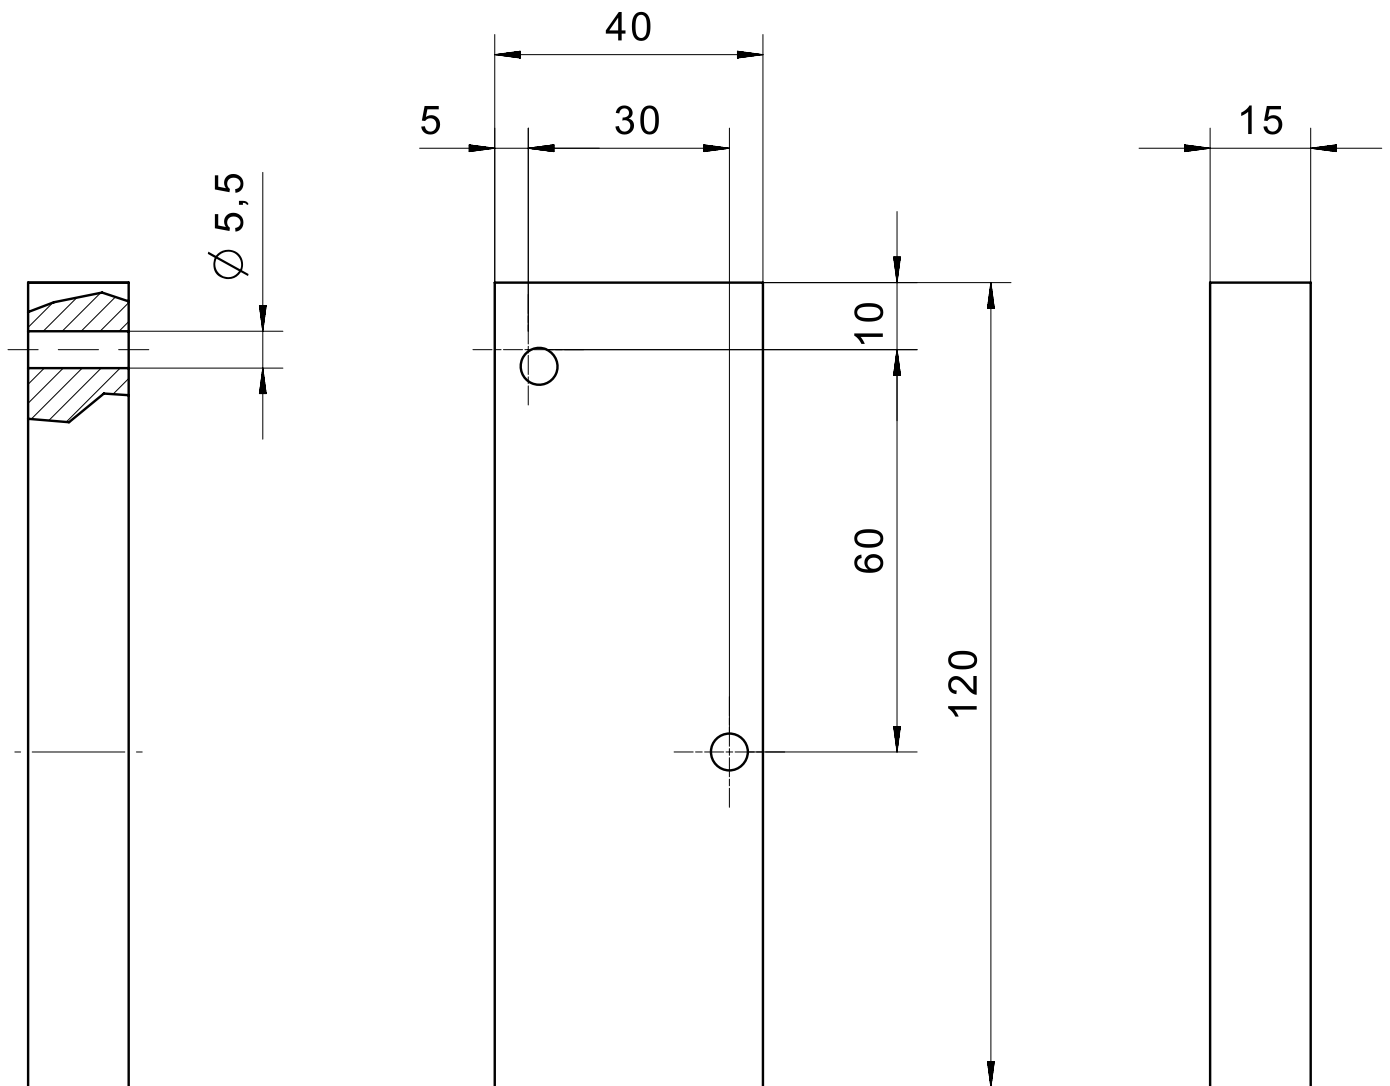


IMAGE 6/8



IMAGE 7/8


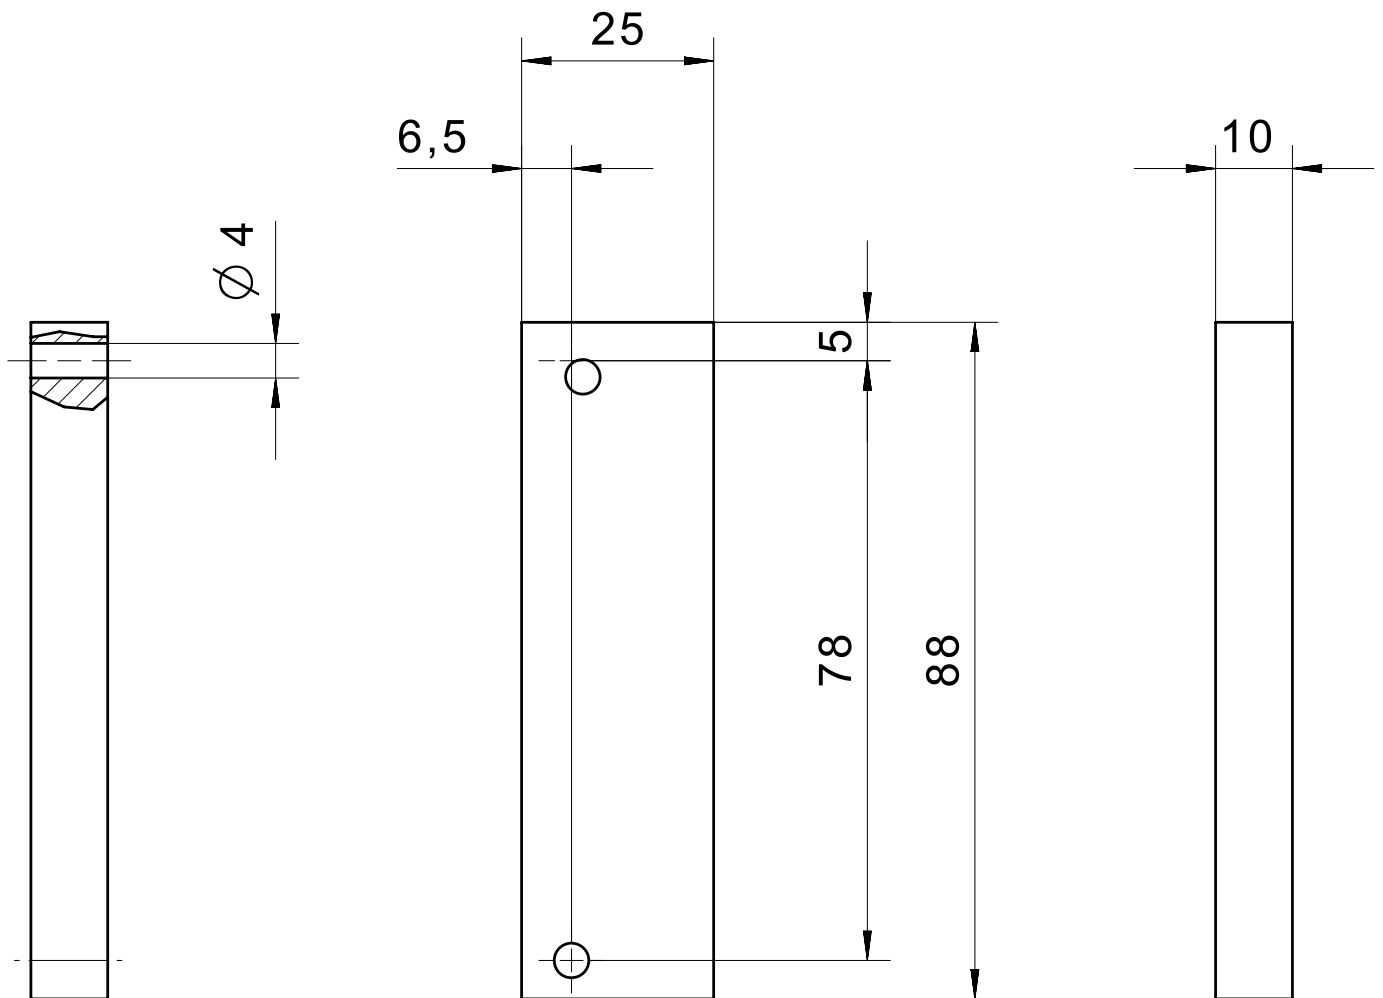


IMAGE 8/8

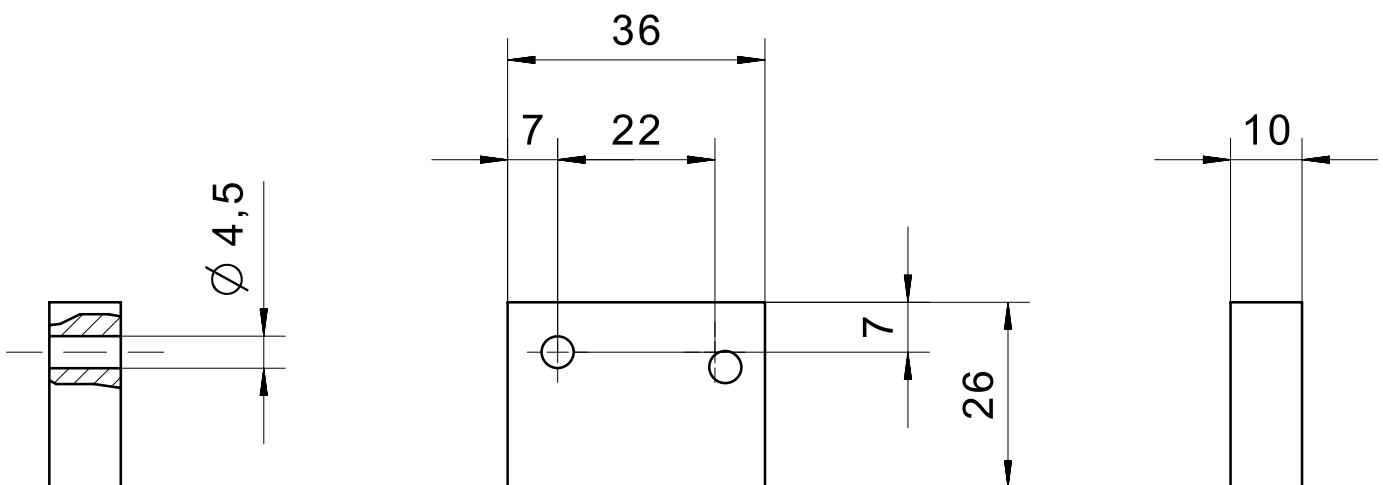

Product options

IMAGE 1/1

ORDERING KEY

| 350 | | Spacer plates |
|-----|-----|---|
| | 002 | For safety sensor 161... |
| | 003 | For actuator 30422112 |
| | 004 | Material thickness 8 mm – for safety sensor 153... and corresponding actuators |
| | 005 | Material thickness 8 mm – for safety sensor 165... and corresponding actuators |
| | 006 | For safety sensor with built-in relay 117... |
| | 007 | For safety sensor 114... and corresponding actuators |
| | 008 | Material thickness 10 mm – for safety sensor 165... and corresponding actuators |
| | 009 | Material thickness 10 mm – for safety sensor 153... and corresponding actuators |