



## Conector AMP Superseal 1,5 2/3 pinos

### Especificação Técnica

- para sensores ultrassônicos modelo 2UF e sensores de ângulo modelo 424A

### Desenho técnico

IMAGE 1/3

L0.C00.B01



IMAGE 2/3

**L0BC00.B01**

**female AMP  
Superseal 1.5**



**L0CC00.B01**

**female AMP  
Superseal 1.5**

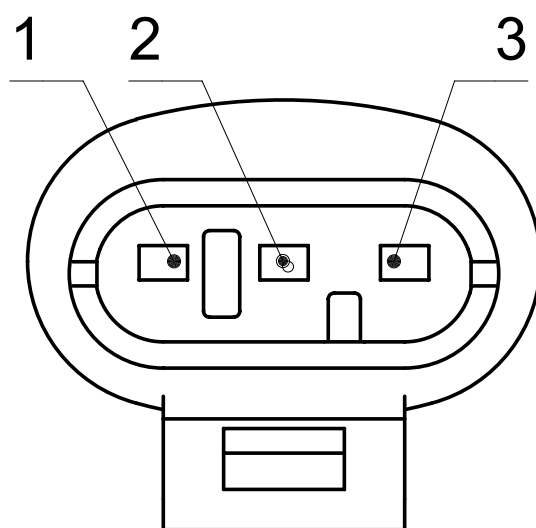


IMAGE 3/3

**L0BC00.B01**

1 ) ————— BU

2 ) ————— BN

**L0CC00.B01**

1 ) ————— BU

2 ) ————— BN

3 ) ————— BK

## Product options

IMAGE 1/1

### ORDERING KEY

L0			AMP Superseal 1.5
	B		Sheath material PVC, grey, 2-pin
	C		Sheath material PVC, grey, 3-pin
		C001B01	Cable length 1m ± 30mm
		C003B01	Cable length 3m ± 40mm
		C005B01	Cable length 5m ± 60mm
		C000B01	Cable length 10m ± 80mm
			Other cable materials and cable lengths on request

## Características do artigo

Attribute	L0BC...B01	L0CC...B01
Cable material	PVC	
Operating temperature min.	-25 °C	
Max. operating temperature	70 °C	
Min. storage temperature	-25 °C	
Max. storage temperature	70 °C	
Connector type	AMP Superseal socket	
Cable diameter	5,7 +/-0,1 mm	5,5 +/-0,2 mm
Number of pins	2	3
Number of strands	2	3
Wire cross section	0.5 mm <sup>2</sup>	
Cable length	Selectable (1m, 3m, 5m, 10m)	